


JWM Solar Analyzer - User Manual
Model: JWM-SA-1PH-60A

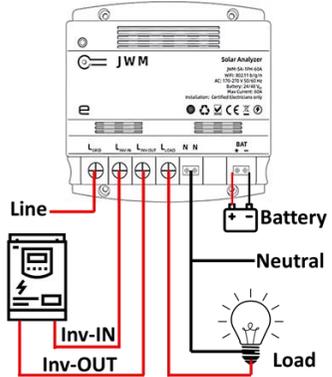


1. Hardware Installation:

Have a qualified technician connect the device to your appliance according to the given wiring diagram.
Important: Please ensure all wires are securely connected before powering up your device. Once powered on, the device's LED indicator should begin blinking.


2. Setting up the Enbryx App:

If you already have an Enbryx account, please skip to Step 3 to add your device.



Otherwise, begin by downloading and installing the Enbryx mobile app from the Google Play Store or Apple App Store. Once the app is installed, open it and tap "Sign Up".


Follow the on-screen prompts and enter the required information to create your Enbryx account.

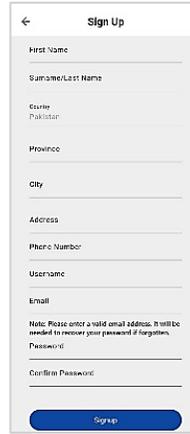

3. Add Your Device:

You will be directed to the device setup screen if:

- a) You are signing in to the Enbryx app for the first time,
- OR**
- b) You selected "Add Devices" from the three-dot menu in the top-right corner of the Devices page on the Enbryx mobile app.

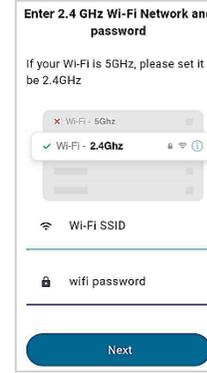

4. Connecting the Device to Your Wi-Fi:

Enter your Wi-Fi SSID and password, then tap "Next" to proceed. You will then be prompted to connect the device.


Note: If the LED light on your device is not blinking, press and hold the device button for at least 10 seconds until it starts to flash. Once the light starts blinking, it should be ready to connect.



5. Connecting to the Device Network:

When the "Enbryx Wi-Fi" popup appears, tap on "Connect" to find and connect to the device network. The device SSID should be displayed as "Enbryx_XXXXXX".

Note: During this step, please make sure your mobile data is turned off.

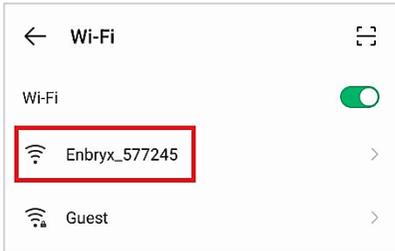

6. Finalizing Device Setup:

Once connected to the device network, you may now return to the Enbryx app and grant any requested Wi-Fi permissions. The device registration screen should now be displayed.

Note: If a "Timeout" message appears, press and hold the device button for 10+ seconds to reset. Once the LED light starts blinking again, return to Step 5.



7. Registering Your Device:

To register your device, begin by entering a device name, followed by the rated power of your connected appliance.

Then, select the appropriate device type from the list of available options. Once all the information is entered, click "Submit".

1ph Generic Hybrid Inverter / UPS

Your device is now registered and will appear in the Devices tab of the Enbryx app.



8. Adding More Devices:

To add more devices, tap the three-dot menu in the top-right corner of the Devices page on the Enbryx mobile app and select "Add Devices".



For additional assistance, please refer to the Help section within the Enbryx mobile app. Scan QR code to download the Enbryx App



 <https://enbryx.com/#/app>